


Treated Polypropylene Layer

Polypropylene Core Layer

Polypropylene Layer

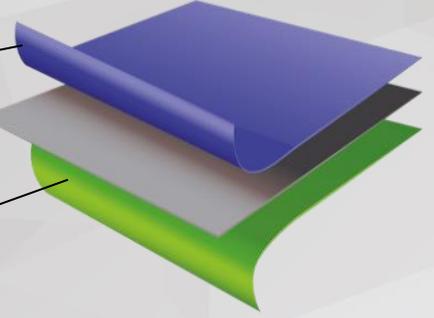

SUPLAIN

1011 AFR

Description

SUPLAIN 1011 AFR is a transparent, biaxially oriented polypropylene (BOPP) film. One side treated. No heat seal property.

It is specially designed for PSA tape applications with enhanced mechanical and optical properties.

Please consult with our sales and marketing department if printed tape application is needed.

Properties

- High gloss and clarity
- High mechanical and dimensional property
- Excellent adhesion to hot melt based adhesives
- Resistance to chemicals, greases and oils
- Good roll formation

Technical Features

PROPERTIES	TEST METHOD	UNITS	1011 AFR		
THICKNESS	ASTM F2251	micron	22	25	28
		Gauge	88	100	112
YIELD	ASTM D4321	m ² /kg	50,0	44,0	39,2
		in ² /Lbs	35.150	30.900	27.600
UNIT WEIGHT	ASTM D4321	g/m ²	20,0	22,8	25,5
HAZE	ASTM D1003	%	1,8		
GLOSS (45 °)	ASTM D2457	%	92		
TENSILE STRENGTH AT BREAK	ASTM D882	MD	N/mm ²	160	
			lb/in ²	23.200	
		TD	N/mm ²	290	
			lb/in ²	42.100	
ELONGATION AT BREAK	ASTM D882	MD	180		
		TD	60		
THERMAL SHRINKAGE (120 °C, 5 min, air)	ASTM D1204	MD	3		
		TD	1		
COEFFICIENT OF FRICTION	ASTM D1894	Film/Film	0,35		
		Film/Metal	0,20		
SURFACE TENSION	ASTM D2578	Dyne/cm	Treated Side	38	
			Other Side	-	

Regulatory Status

Our product complies with the applicable EC legislation on packaging involving direct contact with foods except metallized films. Full details are given on the Regulatory Compliance Certificate and can be found on our web site.

The information contained in this data sheet is true and accurate according to current state of our knowledge and intended to give general information on our products and their applications. Above values are to be considered as guidelines and not as product specifications. Since the actual conditions of use are beyond our control, users are advised to make their own tests at their specific conditions of laboratory and/or actual use. We suggest our customers to determine final suitability for their specific end uses.

Also be advised that information on this data sheet shall not be construed as an inducement or recommendation to use any process or to manufacture or use any product in conflict with existing, pending or future patents.

For related spec sheet with tolerance values, please contact our sales departments