


Printable Aluminium Layer

Polypropylene Core Layer

Sealant Layer

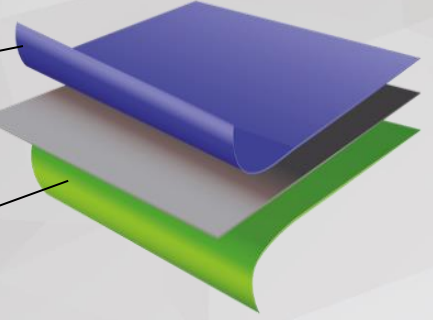

## SUPMET

### 3031

#### Description

SUPMET 3031 is a metallized, coextruded, biaxially oriented polypropylene (BOPP) film for general purpose packaging applications. One side is heat sealable and other side is metallized.

Specially designed for snacks, chips, biscuits, cookies, ice-cream, coffee packaging where the barrier properties are most important. It can be printed and laminated with BOPP, PET and other substrates.

Primering onto metal surface for adequate ink adhesion is highly recommended if used for surface printed applications.

#### Properties

- Brilliant metallic appearance
- Good oxygen, moisture and UV light barrier
- Resistance to chemicals, greases and oils
- Broad seal range
- Excellent heat seal strength and hot tack
- Low static property due to metallic surface
- Enhanced shelf life capability
- The film shelf life is 6 months

## Technical Features

PROPERTIES	TEST METHOD	UNITS	3031						
THICKNESS	ASTM F2251	micron	15	18	20	25	30	35	40
		Gauge	60	72	80	100	120	140	160
YIELD	ASTM D4321	m <sup>2</sup> /kg	73,3	61,1	54,9	44,0	36,6	31,4	27,5
		in <sup>2</sup> /Lbs	51.500	42.900	38.600	30.900	25.800	22.100	19.300
UNIT WEIGHT	ASTM D4321	g/m <sup>2</sup>	13,7	16,4	18,2	22,8	27,3	31,9	36,4
OXYGEN TRANSMISSION RATE	ASTM D3985	cc/m <sup>2</sup> /24hrs	90		80		75		70
		cc/100in <sup>2</sup> /24hrs	5,8		5,2		4,8		4,5
WATER VAPOUR TRANSMISSION RATE	ASTM F1249	g/m <sup>2</sup> /24hrs	0,65		0,50		0,45		0,40
		g/100in <sup>2</sup> /24hrs	0,04		0,03		0,03		0,03
TENSILE STRENGTH AT BREAK	ASTM D882	MD	N/mm <sup>2</sup>	160					
			lb/in <sup>2</sup>	23.200					
		TD	N/mm <sup>2</sup>	290					
			lb/in <sup>2</sup>	42.100					
ELONGATION AT BREAK	ASTM D882	MD	%	160					
				TD	60				
THERMAL SHRINKAGE (120 °C, 5 min, air)	ASTM D1204	MD	%	3					
				TD	1				
COEFFICIENT OF FRICTION	ASTM D1894	Film/Film		0,50					
		Film/Metal		0,25					
OPTICAL DENSITY	INTERNAL	-		2,0					
HEATSEAL RANGE	ASTM F88	°C		105-145					
		°F		221-293					
HEATSEAL STRENGTH (120 °C, 1 MPa, 1 s)	ASTM F88	N/15mm		2,0					

### “Product Identification (Decision 97/129/EC): PP5”

#### Regulatory Status

Our product complies with the applicable EC legislation on packaging involving direct contact with foods except metallized films. Full details are given on the Regulatory Compliance Certificate and can be found on our web site.

The film can also be supplied with ISCC+ certified raw materials with the category of bio-circular feedstock under the product group of SUPRENEW and category of circular feedstock under the product group of SUPCYCLE. SUPRENEW and SUPCYCLE products are certified with “Mass Balance” chain of custody system under ISCC+ and due to chemical processing of the feedstock, there is no compromise & change on any specific feature of the film given in this TDS regardless of the sustainable content in the film. Therefore all product properties of this film covers the same product code with SUPRENEW or SUPCYCLE brand. Three digits will be added to the end of the ISCC+ certified product code. SUPRENEW products will be differentiated with Rxx (R will communicate that the film is circular xx code will communicate the sustainable content % of the film) and SUPCYCLE products will be differentiated with Pxx (P will communicate that the film is circular xx code will communicate the sustainable content % of the film). Further details of the sustainable content of the film will be given in the Sustainability Declaration (SD) prepared for each ISCC+ certified order.

Metallization is a special process and aluminium coated surface is very sensitive to environmental conditions. Even though metal surface tension is above 40 dynes after production, it tends to decrease within time influencing by climatic conditions and storage periods. A guarantee of the duration of surface tension of metallized surface can not be given. We recommend to store metallized films in a dry place and at temperatures below 30°C. It is also advised to use metallized films as 'First in, First Out' principle. In-line treatment and/or priming onto metal surface for adequate ink or coating adhesion is strongly recommended. The metallized surface can normally be laminated with most of the substrates. Other properties of the metallized films are guaranteed for 6 months from the date of production.

The information contained in this data sheet is true and accurate according to current state of our knowledge and intended to give general information on our products and their applications. Above values are to be considered as guidelines and not as product specifications. Since the actual conditions of use are beyond our control, users are advised to make their own tests at their specific conditions of laboratory and/or actual use. We suggest our customers to determine final suitability for their specific end uses.

Also be advised that information on this data sheet shall not be construed as an inducement or recommendation to use any process or to manufacture or use any product in conflict with existing, pending or future patents.

For related spec sheet with tolerance values, please contact our sales departments

STANDARD ROLL DIMENSIONS			
CORE INNER DIAMETER (ID)	CORE OUTER DIAMETER (OD)	LENGTH TOLERANCE	WIDTH TOLERANCE
76 mm (3 in) & 152 mm (6 in)	530 mm & 790 mm *	± % 5 for ≤ 390 mm OD ± % 10 for > 390 mm OD	- 0 & + 4 mm

\* 790 mm OD is available for BOPP films above 350 mm width

REV: 04 Date: 21.03.2025